





# Agean Silver Marble

NATURAL STONE

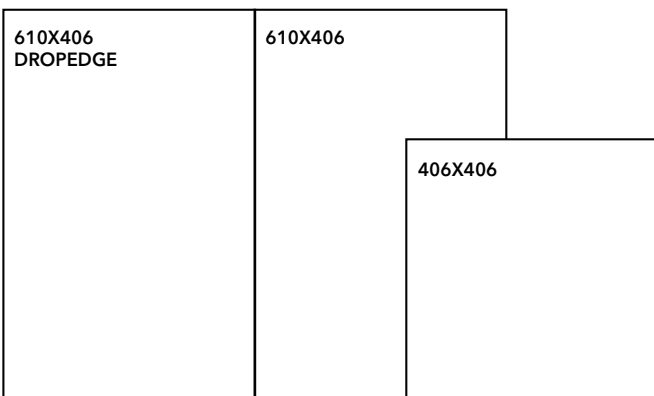


Agean Silver boasts the popular sandbrushed surface which brings the stone to life while maintaining a soft and safe surface. Each tile is uniquely crafted by nature with striking patterns. From architecturally designed projects to the everyday Australia home, this gorgeous stone is sure to complement any project.


## Available formats & finishes




610X406X30




610X406X30/50



610X406X10



406X406X30

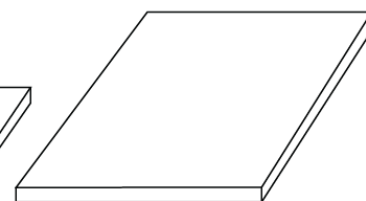

Slabs available upon request

| TYPE            | FORMAT           | FINISH              | WEIGHT PER m <sup>2</sup> | m <sup>2</sup> PER PALLET |
|-----------------|------------------|---------------------|---------------------------|---------------------------|
| TILE            | 610X406X10       | SANDBRUSHED TUMBLED | 28                        | 45.81                     |
| PAVER           | 406X406X30       | SANDBRUSHED TUMBLED | 84                        | 10.88                     |
| PAVER           | 610X406X30       | SANDBRUSHED TUMBLED | 84                        | 16.34                     |
| DROPEDGE COPING | 610X406X30/50 RC | SANDBRUSHED TUMBLED | 23.36                     | 25                        |

*Additional formats and finishes can be produced for custom*

## Test Analysis

| TEST                                      | RESULT                   |
|---|--------------------------|
| REAL DENSITY                              | 2930 Kg/m <sup>3</sup>   |
| SLIP RESISTANCE MEAN (WET CONDITIONS)     | 8.6 SRV                  |
| SLIP RESISTANCE MEAN (DRY CONDITIONS)     | 61.3 SRV                 |
| WATER ABSORPTION                          | 0.1 %                    |
| TOTAL POROSITY                            | 7.1 %                    |
| ABRASION RESISTANCE                       | 18.4 mm                  |
| FLEXURAL STRENGTH UNDER CONCENTRATED LOAD | 13.2 MPa                 |
| FLEXURAL STRENGTH UNDER CONSTANT MOMENT   | 9.6 MPa                  |
| WEIGHT                                    | 2.8 m <sup>3</sup> per T |

Europe Imports stone products are researched at length to ensure only the highest of quality stone is produced and distributed. All our stone selections are of the highest density and formats are produced with only a +/- 1mm tolerance. We work incredibly closely with our quarries and suppliers in the block selection process and have quality assurances in place throughout the process.