





# Tundra Grey Limestone

N A T U R A L   S T O N E

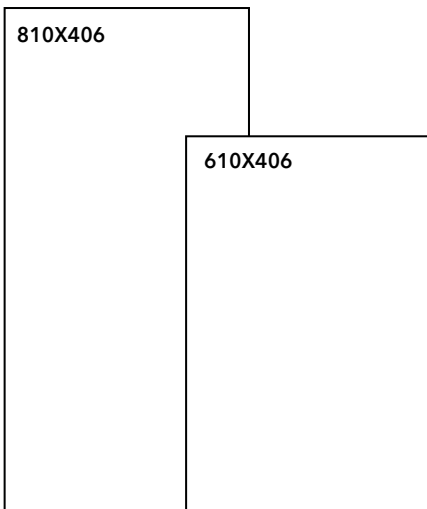

Sourced from one of the first Tundra quarry this most desirable selection is designed with SandBrushed finish emphasizing the stunning patterns and colours that the original Tundra quarry produces. The SandBrushed surface does not only brings the stone to life, it offers a practical solution for outdoor application with slip resistant properties whilst still remaining soft under foot.

## Available formats & finishes

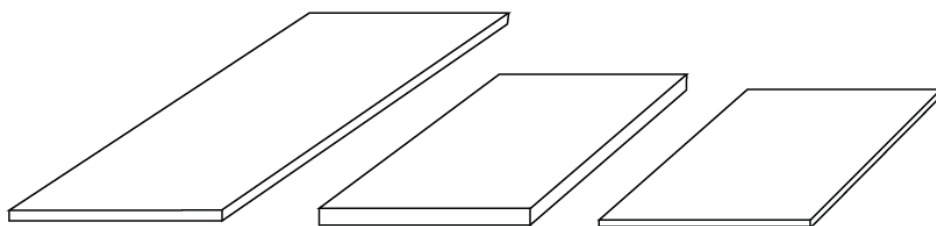

810X406X30

610X406X30

610X406X15

| TYPE  | FORMAT     | FINISH              | WEIGHT PER m <sup>2</sup> | m <sup>2</sup> PER PALLET |
|-------|------------|---------------------|---------------------------|---------------------------|
| TILE  | 610X406X15 | SANDBRUSHED TUMBLED | 41.25                     | 32.19                     |
| PAVER | 610X406X30 | SANDBRUSHED TUMBLED | 82.5                      | 16.34                     |
| PAVER | 810X406X30 | SANDBRUSHED TUMBLED | 82.5                      | 11.51                     |

*Additional formats and finishes can be produced for custom*

## Test Analysis

| TEST                                      | RESULT                    |
|---|---------------------------|
| REAL DENSITY                              | 2703 Kg/m <sup>3</sup>    |
| WATER ABSORPTION                          | 1.29%                     |
| TOTAL POROSITY                            | 6.01%                     |
| ABRASION RESISTANCE                       | 20.54mm                   |
| FLEXURAL STRENGTH UNDER CONCENTRATED LOAD | 5.39MPa                   |
| BREAKING LOAD                             | 1197N                     |
| WEIGHT                                    | 2.87 m <sup>3</sup> per T |

Europe Imports stone products are researched at length to ensure only the highest of quality stone is produced and distributed. All our stone selections are of the highest density and formats are produced with only a +/- 1mm tolerance. We work incredibly closely with our quarries and suppliers in the block selection process and have quality assurances in place throughout the process.



Sealing natural stone is essential in ensuring the longevity of the product. Europe Imports recommend the Chemforce Fortifier Plus for pool coping that will be affected by salt water. This is a penetrating consolidator plus permanent water repellent and protects the stone against salt spalling. For all other areas we recommend the Chemforce Stain-Protector premium impregnating sealer.